

Innovative Reflectarray Design Through Non-Radiating Surface Currents

M. Salucci, A. Gelmini, G. Oliveri, N. Anselmi, and A. Massa

Abstract

In this work, the design of new-generation reflectarrays is dealt with. To this end, an innovative synthesis technique is developed to design the reflectarray surface currents that satisfy both radiation and arbitrary geometry constraints. Accordingly, the reflectarray design is formulated as an inverse source problem, and the non-radiating contribution of the current is profitably synthesized in order to cancel the overall current within selected "*forbidden regions*". Some preliminary results are presented to assess the effectiveness of the developed approach.

Contents

1 Preliminary Numerical Assessment

2

ELEDIA Research Center

1 Preliminary Numerical Assessment

Parameters

- Number of reflectarray elements: $M = N = 55$;
- Operative frequency: $f = 14$ [GHz];
- Polarization: X-CO;
- Number of elements in the forbidden region: $Q = 44$;

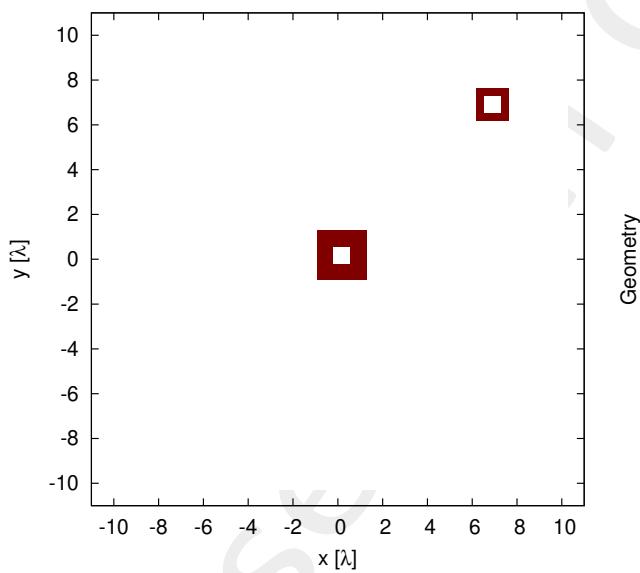


Figure 1: Geometry of the forbidden region Ω .

Results

Magnitude and phase of the *NR* coefficients.

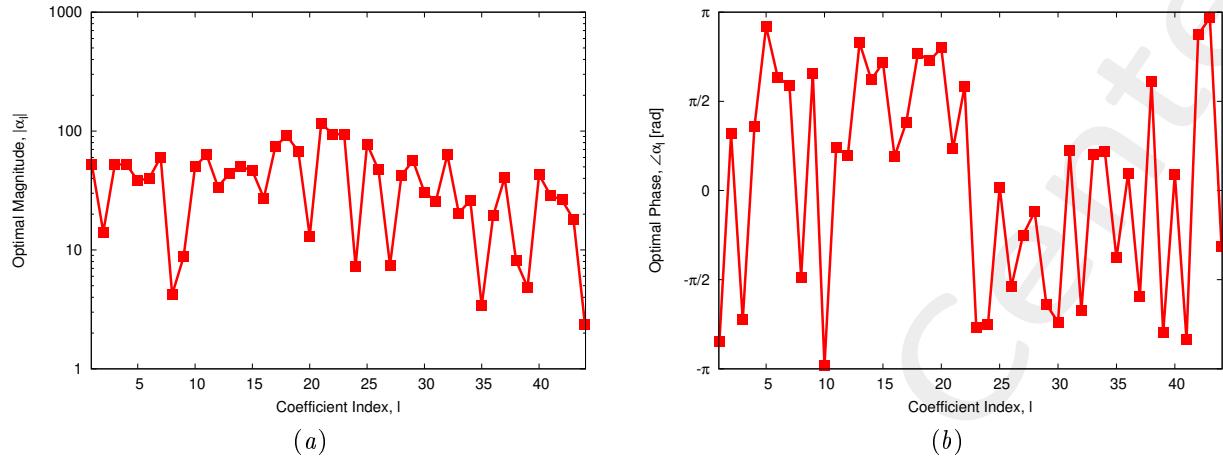


Figure 2: Magnitude (a) and phase (b) of the solution.

Index q	$\Re\{\alpha_q\}$	$\Im\{\alpha_q\}$	Index q	$\Re\{\alpha_q\}$	$\Im\{\alpha_q\}$	Index q	$\Re\{\alpha_q\}$	$\Im\{\alpha_q\}$
1	-4.61×10^1	-2.42×10^1	16	2.26×10^1	1.54×10^1	31	1.97×10^1	1.65×10^1
2	7.68	1.19×10^1	17	2.69×10^1	6.93×10^1	32	-3.25×10^1	-5.42×10^1
3	-3.39×10^1	-3.95×10^1	18	-6.86×10^1	6.04×10^1	33	1.66×10^1	1.20×10^1
4	2.28×10^1	4.75×10^1	19	-4.42×10^1	5.10×10^1	34	2.01×10^1	1.66×10^1
5	-3.71×10^1	9.54	20	-1.06×10^1	7.72	35	1.28	-3.16
6	-1.63×10^1	3.66×10^1	21	8.63×10^1	7.74×10^1	36	1.86×10^1	5.76
7	-1.67×10^1	5.81×10^1	22	-2.46×10^1	9.11×10^1	37	-1.18×10^1	-3.87×10^1
8	1.98×10^{-1}	-4.21	23	-7.05×10^1	-6.18×10^1	38	-2.73	7.62
9	-4.10	7.72	24	-5.16	-5.19	39	-3.91	-2.87
10	-5.03×10^1	-2.62	25	7.77×10^1	4.61	40	4.12×10^1	1.21×10^1
11	4.62×10^1	4.33×10^1	26	-5.89	-4.67×10^1	41	-2.49×10^1	-1.42×10^1
12	2.75×10^1	1.97×10^1	27	5.27	-5.26	42	-2.43×10^1	1.02×10^1
13	-3.79×10^1	2.27×10^1	28	3.94×10^1	-1.55×10^1	43	-1.79×10^1	1.75
14	-1.88×10^1	4.68×10^1	29	-2.38×10^1	-5.12×10^1	44	1.30	-1.98
15	-2.91×10^1	3.60×10^1	30	-2.08×10^1	-2.24×10^1			

Table I: Solution of the linear system

Currents Distribution

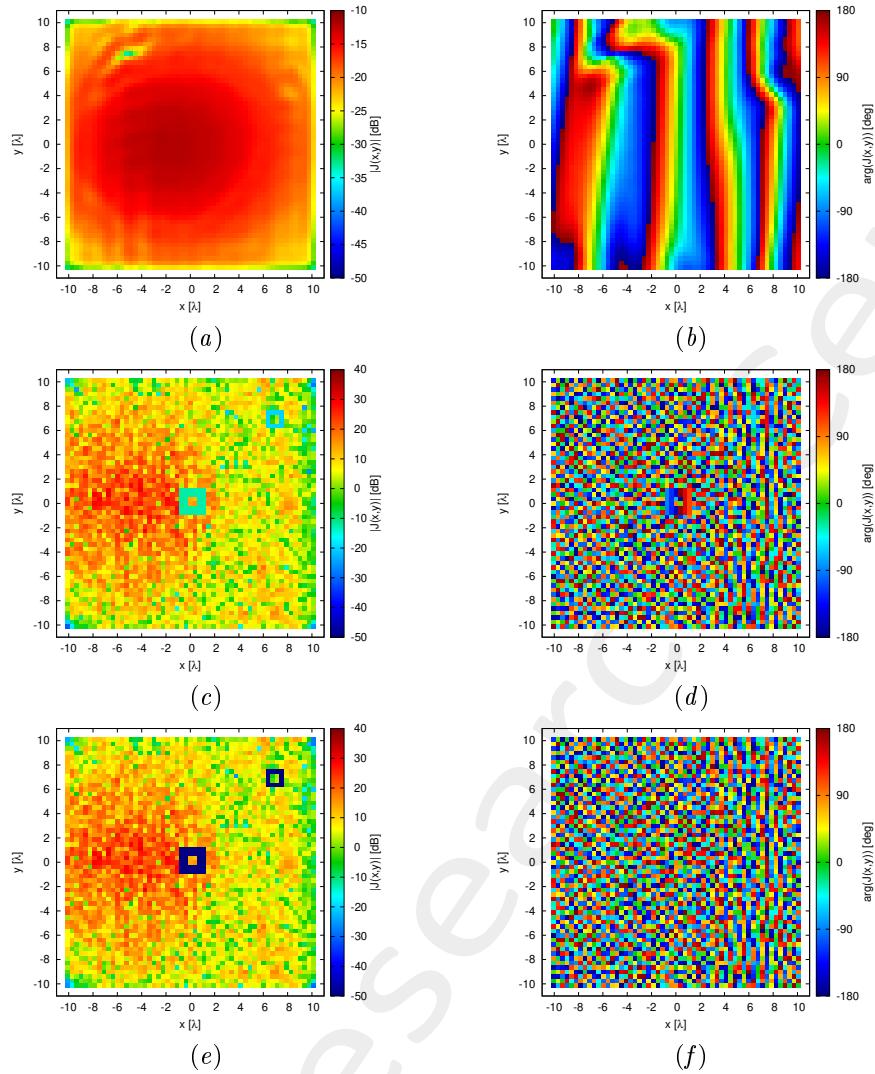


Figure 3: (a)(c)(e) Magnitude and (b)(d)(f) phase (a)(b) of $J^{MN}(x,y)$, (c)(d) $J^{NR}(x,y; \underline{\alpha})$, and (e)(f) $J^{TOT}(x,y; \underline{\alpha})$.

Radiated Field

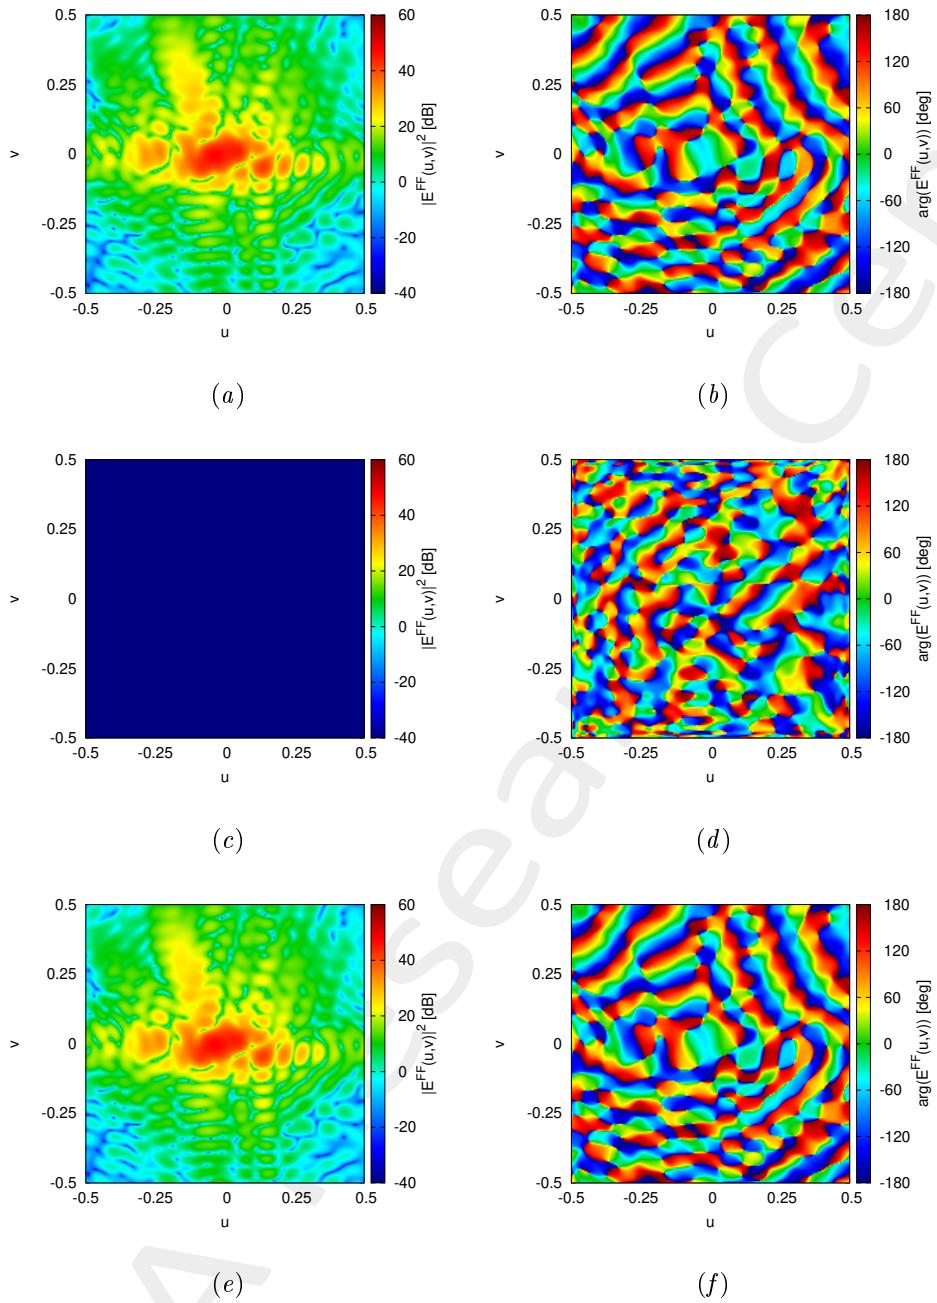


Figure 4: (a)(c)(e) Magnitude and (b)(d)(f) phase of the radiated field by (a)(b), $J^{MN}(x,y)$, (c)(d) $J^{NR}(x,y;\underline{\alpha})$, and (e)(f) $J^{TOT}(x,y;\underline{\alpha})$.

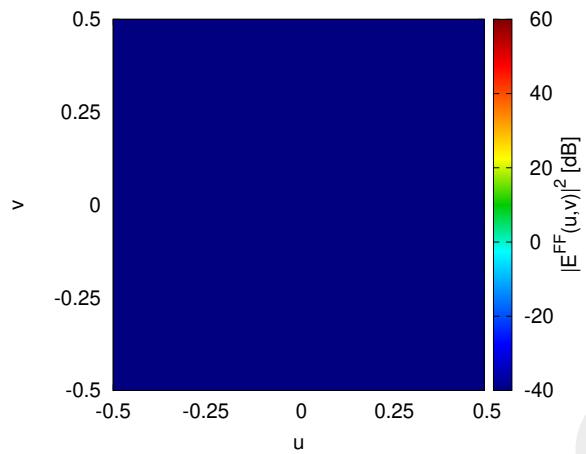


Figure 5: Magnitude of the difference between the radiated fields by $J^{MN}(x, y)$ and $J^{TOT}(x, y; \underline{\alpha})$.

More information on the topics of this document can be found in the following list of references.

References

- [1] P. Rocca, G. Oliveri, R. J. Mailloux, and A. Massa, "Unconventional phased array architectures and design methodologies: A review," *Proc. IEEE*, vol. 104, no. 3, pp. 544-560, Mar. 2016 (DOI: 10.1109/JPROC.2015.2512389).
- [2] P. Rocca, L. Poli, N. Anselmi, M. Salucci, and A. Massa, "Predicting antenna pattern degradations in microstrip reflectarrays through interval arithmetic," *IET Microw. Antennas Propag.*, vol. 10, no. 8, pp. 817-826, Mar. 2016 (DOI: 10.1049/iet-map.2015.0837).
- [3] M. Salucci, L. Tenuti, G. Oliveri, and A. Massa, "Efficient prediction of the EM response of reflectarray antenna elements by an advanced statistical learning method," *IEEE Trans. Antennas Propag.*, vol. 66, no. 8, pp. 3995-4007, Aug. 2018 (DOI: 10.1109/TAP.2018.2835566).
- [4] M. Salucci, A. Gelmini, G. Oliveri, N. Anselmi, and A. Massa, "Synthesis of shaped beam reflectarrays with constrained geometry by exploiting non-radiating surface currents," *IEEE Trans. Antennas Propag.*, vol. 66, no. 11, pp. 5805-5817, Nov. 2018 (DOI: 10.1109/TAP.2018.2869036).
- [5] G. Oliveri, Y. Zhong, X. Chen, and A. Massa, "Multi resolution subspace-based optimization method for inverse scattering," *J. Opt. Soc. Amer. A, Opt. Image Sci.*, vol. 28, no. 10, pp. 2057-2069, Oct. 2011 (DOI: 10.1364/JOSAA.28.002057).
- [6] L. Poli, G. Oliveri, F. Viani, and A. Massa, "MT-BCS-based microwave imaging approach through minimum-norm current expansion," *IEEE Trans. Antennas Propag.*, vol. 61, no. 9, pp. 4722-4732, Sep. 2013 (DOI: 10.1109/TAP.2013.2265254).
- [7] N. Anselmi, P. Rocca, M. Salucci, and A. Massa, "Irregular phased array tiling by means of analytic schemata-driven optimization," *IEEE Trans. Antennas Propag.*, vol. 65, no. 9, pp. 4495-4510, Sep. 2017 (DOI: 10.1109/TAP.2017.2722539).
- [8] L. Poli, P. Rocca, M. Salucci, and A. Massa, "Reconfigurable thinning for the adaptive control of linear arrays," *IEEE Trans. Antennas Propag.*, vol. 61, no. 10, pp. 5068-5077, Oct. 2013 (DOI: 10.1109/TAP.2013.2272452).
- [9] L. Poli, G. Oliveri, P. Rocca, M. Salucci, and A. Massa, "Long-Distance WPT Unconventional Arrays Synthesis," *J. Electromagn. Waves Appl.*, vol. 31, no. 14, pp. 1399-1420, Jul. 2017 (DOI: 10.1080/09205071.2017.1348998).
- [10] M. Salucci, G. Gottardi, N. Anselmi, and G. Oliveri, "Planar thinned array design by hybrid analytical-stochastic optimization," *IET Microw. Antennas Propag.*, vol. 11, no. 13, pp. 1841-1845, Oct. 2017 (DOI: 10.1049/iet-map.2017.0349).
- [11] P. Rocca, T. Moriyama, N. Anselmi, and A. Massa, "Robust prediction of the radiated pattern features with uncertainties in reflectarray design," *2014 IEEE Antenna Conference on Antenna Measurements and*

Applications (IEEE CAMA 2014), Antibes Juan-les-Pins, France, pp. 1-3, November 16-19, 2014 (DOI: 10.1109/CAMA.2014.7003440).

- [12] G. Oliveri, A. Gelmini, M. Salucci, D. Bresciani, and A. Massa, “Exploiting non-radiating currents in reflectarray antenna design,” *11th European Conference on Antennas and Propagation (EuCAP 2017), Paris, France*, pp. 88-91, March 19-24, 2017 (DOI: 10.23919/EuCAP.2017.7928547).